


Loop Sensor

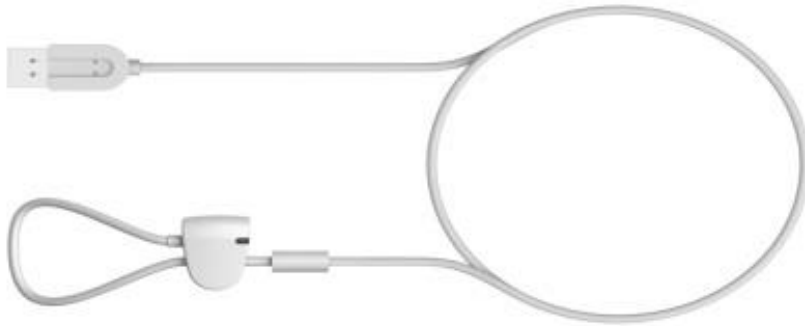

Unscrew the clip on the Headphone Loop Sensor using the allen key provided, remove the cable and loop the cable around the a closed loop on the product being protected-. Then replace the cable, close the clip and re-tighten the screw. Insert the USB end of the sensor into the controller, an audible alert will be heard and the LED on the controller and the sensor will remain on. The device is now being protected.

Alarm Activation

- If the alarm activates an audible sound will be heard and the LED on the alarmed controller and sensor cable will flash.
 - Press the mute button on the remote control.
- Correct the problem with the sensor cable, the alarmed controller will set automatically and there will be an audible sound for confirmation.
 - The system is now armed.

